




EXCESS FLOW VALVES – 2180

2180 Series Excess Flow Valves are designed for use in liquid, vapor or mixed service. It can be either a single or a two-phase valve. The 2180 Series has female NPT connections on both the inlet and outlet sides. It is designed with a manual reset rather than a weep hole in the disc for pressure equalization and automatic resetting. Available in standard carbon steel, the body can also be offered in stainless steel. Internal components are available in stainless steel. Each valve comes standard with an Inconel spring. Closing flow rates are factory preset per customer's specifications.

Model	Size	Connection Type	Length	Cv
2180-E	1"	1" FNPT	5 1/8"	22 - 27
2180-I	2"	2" FNPT	5 5/8"	30 - 56
2180-K	3"	3" FNPT	6 7/8"	60 - 100
2180-L	4"	4" FNPT	8 1/2"	100 - 160
2180-M	5"	5" FNPT	As Req.	181 - 227
2180-N	6"	6" FNPT	As Req.	227 - 450
2180-P	8"	8" FNPT	As Req.	600 - 750

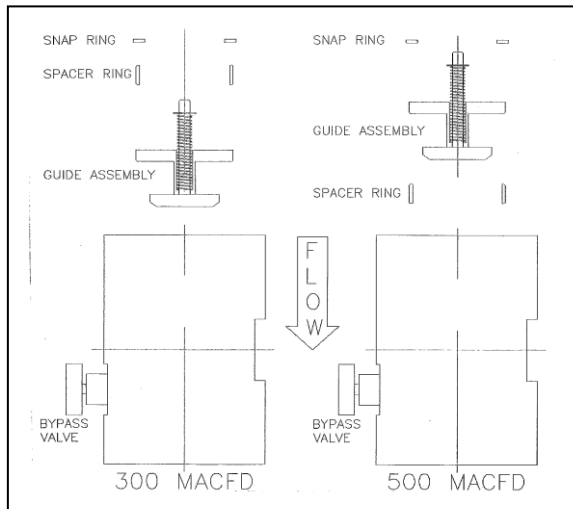

Data contained herein can be altered to accommodate design changes and changes to increase performance. Information on this page is the sole property of L6 Inc. d/b/a Total Valve Systems.

