




EXCESS FLOW VALVE – 2120

2120 Series Excess Flow Valves are designed for use in liquid or vapor service. These valves are heavily constructed and can withstand years of service. The 2120 Series comes standard with 150# or 300 # ANSI class flanges. Available standard in carbon or stainless steel; however, other materials are available upon request. The 2120 series comes with flanged connections, but can be ordered with a butt welded or threaded connection option. Closing flow rates for the 2120 Series Excess Flow Valves are factory preset per customer requirements.

Model	Size	150# ANSI Flanges		300# ANSI Flanges		600# ANSI Flanges		C Length	D Orifice Dia..
		A Dia.	B Width	A Dia.	B Width	A Dia.	B Width		
2120-G	1.5"	5.00	0.68	6.12	0.81	6.12	0.88	4.0	0.812
2120-I	2"	6.00	0.75	6.50	0.88	6.50	1.00	4.5	1.1
2120-K	3"	7.50	0.94	8.25	1.12	8.25	1.25	5.25	1.65
2120-L	4"	9.00	0.94	10.00	1.25	10.75	1.50	5.5	2.2
2120-M	6"	11.00	1.00	12.50	1.44	14.00	1.88	6.5	3.3
2120-N	8"	13.50	1.12	15.00	1.62	16.50	2.19	8.0	4.5
2120-P	10"	16.00	1.19	17.50	1.88	20.00	2.50	9.5	5.5
2120-Q	12"	19.00	1.25	20.50	2.00	22.00	2.62	11.0	6.6
2120-R	14"	21.00	1.38	23.00	2.12	23.75	2.75	13.0	7.7

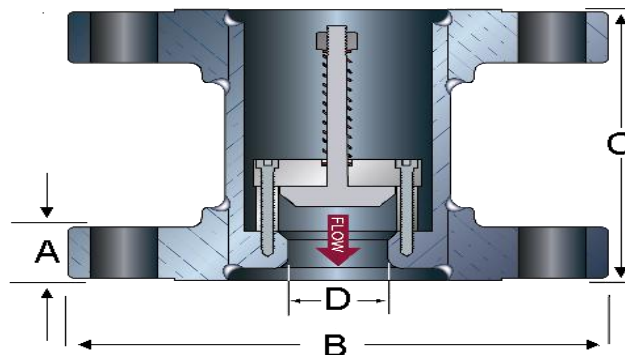

Typical dimensions are listed. Data contained herein can be altered to accommodate design changes and changes to increase performance. Information on this page is the sole property of L6 Inc. d/b/a Total Valve Systems.

Corporate Office
1300 East Memphis 74012
P.O. Box 1957
Broken Arrow, OK 74013

1-800.324.7035
918.258.7035 Tel/918-251.6426 Fax
Email: sales@totalvalve.com
Web Site: www.totalvalve.com