




EXCESS FLOW VALVE – 2400

2400 Series Excess Flow Valves are designed to provide protection for LPG (Liquid Propane Gas) service with a specific weight of 0.508 kg/L. The 2400 Series is designed to meet specific flow requirements and size requirements. These requirements are listed in the data below. The internal parts for the valves are stainless steel while the bodies are carbon steel.

Excess Flow Valve 2400		
Tender		
Item #	DWG #	SIZE
1	2400-1	20" x 24"
2	2400-2	10" x 12"
3	2400-3	4" x 6"
4	2400-4	16" x 16"
5	2400-5	10" x 12"
6	2400-6	2" x 4"
7	2400-7	4" x 6"
8	2400-8	2" x 3"
9	2400-9	2" x 3"
10	2400-10	3.5" x 4"
11	2400-11	10" x 12"

Dimensions in mm						
A	B	C	D	E	F	G
692	479	505	500	806	70	593
381	243	265	270	581	31	488
216	100	120	180	495	36	443
470	354	380	400	632	40	492
381	243	265	270	513	31	420
157	41	53	100	480	31	446
216	100	120	180	480	31	425
157	41	53	100	80	31	N/A
127	41	53	100	80	28	N/A
157	84	98	180	290	31	240
381	243	265	270	510	31	410

- A- Flanged OD
- B- Bore
- C- Body OD
- D- Spring
- E- Body – flange
- G – Flange to bottom of hole

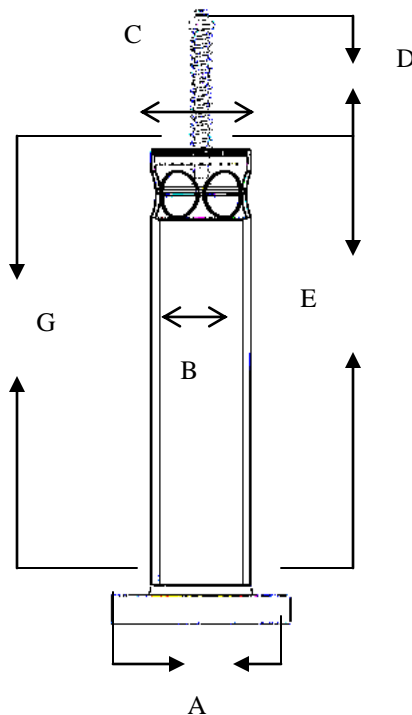

Typical dimensions are listed. Data contained herein can be altered to accommodate design changes and changes to increase performance. Information on this page is the sole property of L6 Inc. d/b/a Total Valve Systems.

Corporate Office
1300 East Memphis 74012
P.O. Box 1957
Broken Arrow, OK 74013

1-800.324.7035
918.258.7035 Tel/918-251.6426 Fax
Email: sales@totalvalve.com
Web Site: www.totalvalve.com