

Hydroseal

Product Summary



High Performance, Economy & Pilot Valve Series

Series 1500 Threaded & Flanged Safety Relief Valves

Features

- Versatility to Handle Air, Gas, Steam & Liquid Service with the Same Configuration & Trim
- Both Flat Lapped Metal-To-Metal Seat & Bubble Tight Soft Seat Designs Available
- Manufactured in Accordance with ASME Code Section VIII, NBBI Capacity Certified
- Pressure Ranges from 5 PSI to 6173 PSI
- Temperature Ranges from -320 °F to +1000 °F




Series 1500

Series 2500 Flanged High Capacity Safety Relief Valves

Features

- Self Aligning Disc & Guided One-Piece Disc Holder Assembly
- Replaceable O-Ring Soft Seats
- Interchangeable Discs for Metal-To-Metal & Soft Seat Seals
- Same Internals for Air, Gas, Liquid & Steam Service Applications
- Meets API 526 & 527 with Available Orifices "D" through "T"
- Available with NACE & Bellows Option
- Manufactured in Accordance with ASME Code Section VIII, NBBI Capacity Certified

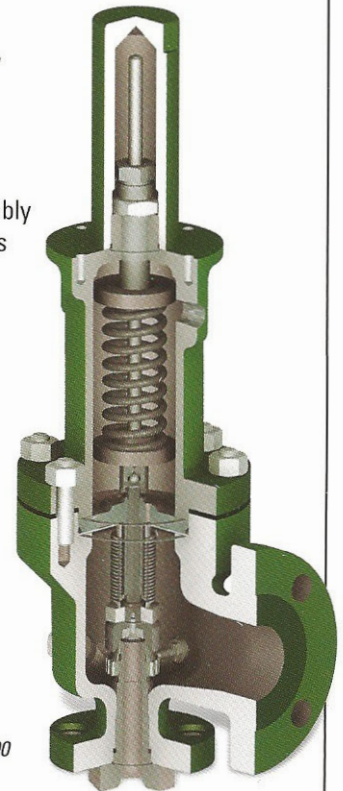

Series 2500


Series 1200 & 1400 Safety Relief Valves

Features

- The Ideal SRV for Both OEM, Gas Compression, Separators, Dehydrators, Gas Production Units & Similar Applications
- Available in 3/4" - 2" Inlets with Pressures to 2000 PSI
- Replaceable O-Ring Seat Seal for Bubble Tight Service
- ASME UV Code Stamped for Gas & Liquids
- Same Design for Gas & Liquids



Series 1200

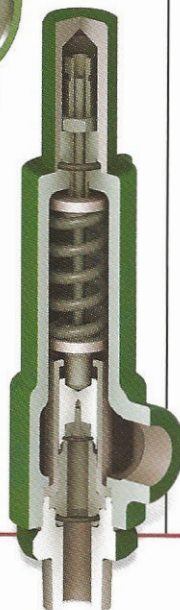


Series 1400

Series 3500 Pilot Operated Relief Valves

Features

- Snap Acting
- API Orifice Sizes "D" through "T"
- Air & Gas Applications
- Replaceable O-Ring Seals
- Meets API 520, 526 & 527
- Meets API Class 150 through 2500 Flange Ratings

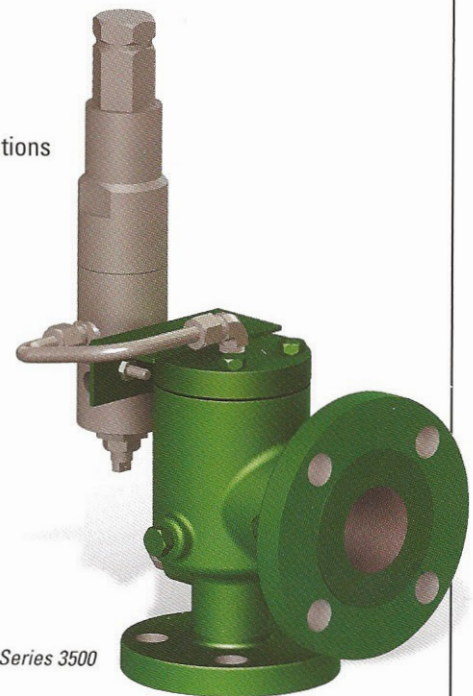

Series 3500



www.TotalValve.com | (800) 324-7035

Ball & Seat/High Capacity & Special Applications

Series 1-4 Ball & Seat Threaded Safety Relief Valves

Features

- Incorporates Hydroseal's "Self-Seeking Seat" Design
- Ideal Where Economical Low Flow Overpressure Protection is Required
- ASME UV Code Stamped for Air & Gas
- Operating Temperatures to 450 °F
- 1/4"-1" NPT Inlet Sizes




Series 1-4

Series 5-8 Ball & Seat Safety Relief Valves

Features

- 1 1/4" - 2" Inlet Sizes
- Incorporates Hydroseal's "Self-Seeking Seat" Design
- Viton® Soft Seat Option Provides Primary Seal with a Metal-To-Metal Secondary Seal
- Manufactured in Accordance with ASME Code Section VIII, NBBI Capacity Certified

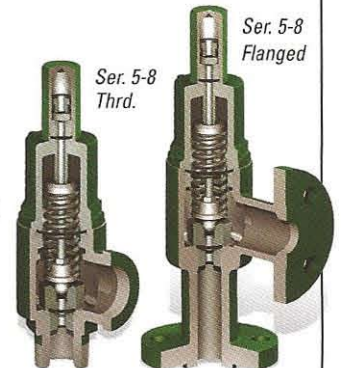


Ser. 5-8 Thrd.

Ser. 5-8 Flanged

FT, HC (Air) & HD (Liquid) Series Threaded/ Flanged Safety Relief Valves

Features

- Disc & O-Ring Soft Seat Design Provide High Flow
- ASME Semi-Nozzle Fixed Blowdown Valve
- Bubble Tight Seal Suitable for Various Relief Applications
- Inlets from 3/4" - 2" with Set Pressures to 3500 PSI

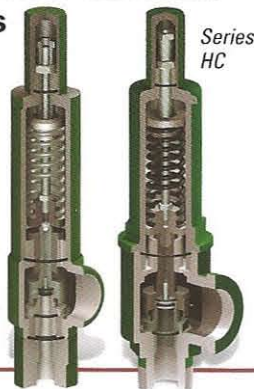

Series FT

Series HC

Bronze Safety Relief Valves


Features

- Compact Affordable Alternative for Air, Gas & Liquid Service Under 300 PSI
- Available in 1/2" - 3" Inlets
- Provides Ideal Overpressure Protection for Steam Boilers, Sterilizers, Distillers, Cookers, Piping Systems & Unfired Pressure Vessels

High Pressure Check Valves

Features

- Designed for Applications Requiring a High Pressure Pressure Easy-To-Maintain Steel Check Valve
- Easy Service Cartridge Barrel Design
- Pressures to 3000 PSI
- Operating temperatures to 450 °F
- 1/2" - 2" FNPT & Socket Weld




High Pressure Check Valve

High Pressure "Y" Strainers

Features

- Designed for High Pressure Applications Requiring an Easy Maintenance, Collapse Resistant Screen
- In-Line Cleanout Access
- Pressures to 3000 PSI
- 1/2" - 2" FNPT & Socket Weld
- Spiral Wound Stainless Steel Screen



High Pressure "Y" Strainer

Pressure Monitor Plugs

Features

- 316 Stainless Steel Materials
- 10,000 PSI Working Pressure
- Bubble Tight Seal
- Mesh Screen Filters Debris, Eliminating Potential Clogs in Expensive Delicate Gauges
- 1/2" MNPT Connection
- Gauge Hazardous Materials Safely
- Reduces Cost By Limiting the Number of Expensive On Site Gauges
- Take Pressure Readings & Sample Line Fluids in Seconds
- Troubleshoot Without Breaking Pressure in Lines
- Compatible with Competitor Probe Designs

Applications

- Wellheads
- Flow Lines
- Pressure Vessels
- Water Purification Systems
- Steel Mills
- Chemical Plants
- Waterflood Injection Systems
- Reverse Osmosis Systems




Pressure Monitor Plug



www.TotalValve.com | (800) 324-7035

Worldwide Sales Offices

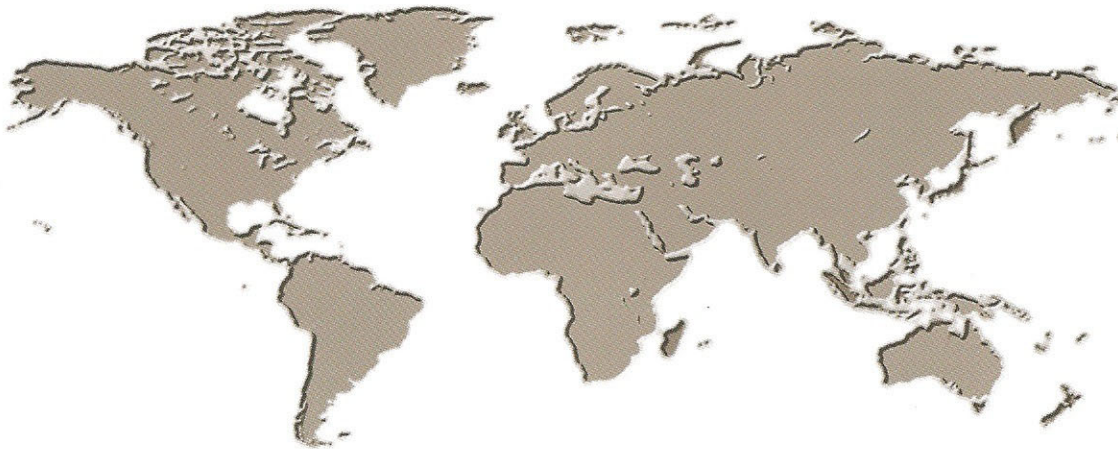

**Hydroseal, a leading brand of CIRCOR Energy Products, Inc.
reaches into every corner of the globe serving the oil & gas and industrial marketplace.**

**Supplying an extensive range of product offerings
through a worldwide network of manufacturer representatives and distributors,
Hydroseal is the right choice for all your instrumentation needs.**

World Headquarters

Hydroseal
1500 S.E. 89th Street
Oklahoma City, OK 73149 USA
Phone: (405) 631-1533
Fax: (405) 631-5034
E-mail: sales@circorenergy.com
www.circorenergy.com

Local Representative



(800) 324-7035
www.TotalValve.com



Registered to the ISO 9001
Quality System Standard,
accredited by U.K., Dutch
and German qualifying
authorities.



www.circorenergy.com