




ISOLATION VALVE – 8000T

Isolation Valve Model 8000T is designed to incorporate two safety relief valves to protect in an overpressure emergency. Only one safety relief valve is in operation while the other is a back up. If a problem occurs, such as a leak, simply switch to the other safety relief valve and remove the faulty one and make repairs. This insures that one safety relief valve is in operation at all times.

Features :

- Automatic pressure balance at start of position change.
- Pressure bleed valve at each position also serves for in-line testing.
- Locking device permits valve to be locked in operating position only. (Optional)
- Low profile design for easy installation in tight areas.
- External position indicator shows which safety relief is in operation.
- Double sealed selector assures over pressure relief protection at all times.
- Standard o-ring seating keeps maintenance cost to a minimum.
- Low pressure drop permits maximum SRV performance. CV factor (stem end) provided to assist valve to conform with API RP 520 Part 2 Section 2.2 recommended practices.
- Sizes ½” through 6”.

SIZE (inches)	A		B	C	Cv*	@CS WEIGHT
	IN	OUT				
1/2	8	8 15/16	3 3/4	2 1/4	9.5	10#
3/4	10 7/16	11 1/2	5 7/8	2 1/2	22	15#
1	11	12 1/4	5 7/8	3	23	25#
1 1/2	14 1/8	16	7 3/4	3 1/2	67	50#
2	17 3/8	19 7/8	9 3/4	4	81	60#
4	23 1/2	32	16	11	300	300#

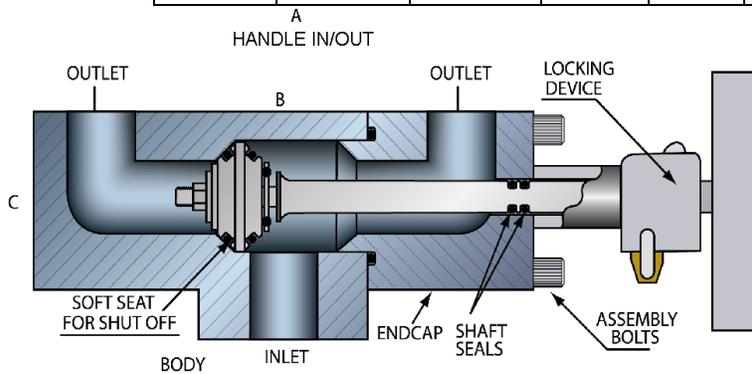

Typical dimensions are listed. Data contained herein can be altered to accommodate design changes and changes to increase performance. Information on this page is the sole property of L6 Inc. d/b/a Total Valve Systems.

Corporate Office
1300 East Memphis 74012
P.O. Box 1957
Broken Arrow, OK 74013

1-800.324.7035
918.258.7035 Tel/918-251.6426 Fax
Email: sales@totalvalve.com
Web Site: www.totalvalve.com