

MODEL 2160




EXCESS FLOW VALVE

The Model 2160 Excess Flow Valve has male NPT connections on the inlet side and male NPT connections on the outlet side. The 2160 is designed for use in liquid, gas or vapor service to stop flow in the event of a sudden flow rate change.

NPS	2130	2140	2150	2160	2170	2155	2180
0.75"	4.00"	4.00"	4.00"	4.00"	4.00"	6.00"	4.00"
1	4.00	4.00	4.00	4.00	4.00	6.00	4.00
1.5	4.50	4.50	4.50	4.50	4.50	6.50	4.50
2	5.63	5.63	5.63	5.63	5.63	7.63	5.63
3	7.25	7.25	7.25	7.25	7.25	9.25	7.25
4	9.00	9.00	9.00	9.00	9.00	11.00	9.00

These dimensions are for standard designs as reference only.
Valves can be custom-engineered as needed.

Typical dimensions are listed. Data contained herein can be altered to accommodate design changes and changes to increase performance.
Information on this page is the sole property of L6 Inc. d/b/a Total Valve Systems

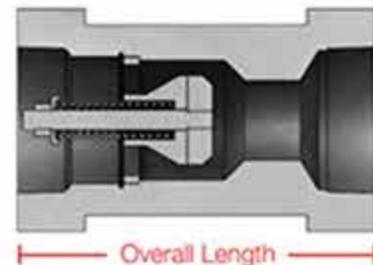

Basic options include carbon steel bodies & stainless internals with other materials & pressure classes available upon request.