



### Features

- Designed for use with forward acting SFAZ and FDZ series disks
- Flat seat provides improved rupture disk sealing
- Available in nominal sizes ranging from 1/2" (13 mm) thru 30" (750 mm) in standard flange classes
- Standard materials of construction are: 316 and carbon steel. Other materials available on request
- Flow direction arrows on disk tag and holder provides permanent visual verification that holder assembly is properly oriented in the piping system
- Stainless steel safety designed side clips are standard, allowing for pre-assembly of disk into holder

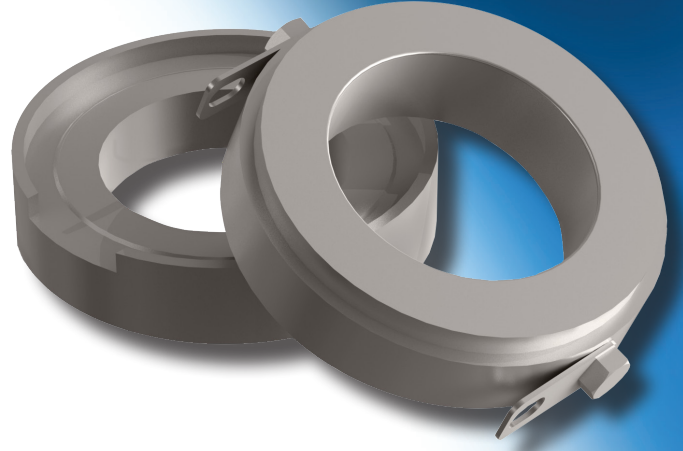

### Options / Accessories

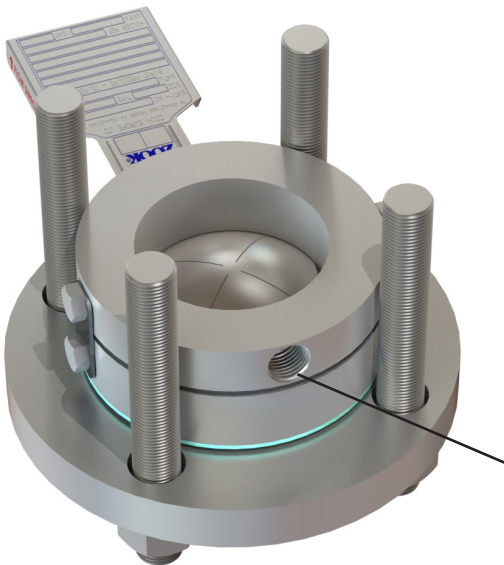

#### Eye Bolt

- To assist in lifting



#### PTFE Sleeved Holder Inlet


- Ideal for corrosive applications and reducing product build-up (Refer to PTFE Sleeved Holder Inlet Data Sheet)

#### Tantalum Coating


- Ideal for extreme corrosive applications and higher temperatures

#### Gauge Tap

- Used for monitoring pressure/temperature at rupture disk location
- Also available on inlet holder

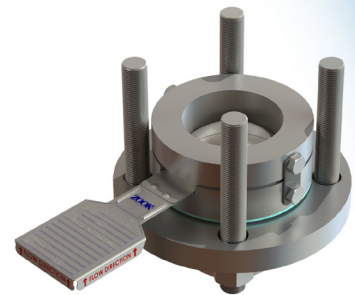

UHZ



UHZ7

# UHZ Series Dimensions and Specifications

## Holder Dimensions / Specifications

Nominal Size	Flange Class	Height (in / mm)	Holder O.D. (in / mm)	Estimated Weight (lbs / kgs)
1/2"	150	1.63	1.75	1.1
	300/600		2	1.4
13 mm	10/16/25/40	41.3	51	0.7
3/4"	150	1.63	2.125	1.3
	300/600		2.5	2.0
20 mm	10/16/25/40	41.3	61	0.8
1"	150	1.63	2.5	1.8
	300/600		2.75	2.3
25 mm	10/16/25/40	41.3	71	1.1
1-1/2"	150	1.63	3.25	2.9
	300/600		3.63	3.9
40 mm	10/16/25/40	41.3	92	1.8
2"	150	1.63	4	4.0
	300/600		4.25	4.8
50 mm	10/16/25/40	41.3	107	2.1
2-1/2"	150	1.63	4.75	5.5
	300/600		5	6.5
65 mm	10/16/25/40	41.3	127	3.0
3"	150	1.63	5.25	6.3
	300/600		5.75	8.5
80 mm	10/16/25/40	41.3	142	3.5
4"	150	1.875	6.75	11.9
	300		7	13.3
100 mm	10/16	47.6	162	4.4
6"	150	2.5	8.63	20.2
	300		9.75	33.2
150 mm	10/16	63.5	218	9.0
8"	150	2.875	10.88	33.2
	300		12	51.8
200 mm	10/16	73	273	14.2

Nominal Size	Flange Class	Height (in / mm)	Holder O.D. (in / mm)	Estimated Weight (lbs / kgs)
10"	150	3.25	13.25	53.3
	300		14.13	72.9
250 mm	10	82.6	328	20.9
	16		329	21.3
12"	150	3.63	16	90.9
	300		16.5	105.7
300 mm	10	92.1	378	27.0
	16		384	29.9
14"	150	3.88	17.63	111.6
	300		19	160.7
350 mm	10	98.4	438	44.8
	16		444	48.4
16"	150	4.38	20.13	163.9
	300		21.13	209.2
400 mm	10	111.1	489	57.2
	16		495	61.7
18"	150	4.75	21.5	165.0
	300		23.38	265.5
450 mm	10	120.7	539	68.4
	16		555	83.1
20"	150	5.5	23.75	226.8
	300		25.63	354.8
500 mm	10	139.7	594	92.1
	16		617	119.2
24"	150	6.5	28.13	351.3
	300		30.38	566.3
600 mm	10	165.1	695	128.0
	16		734	192.0
30"	150	4.75	34.63	338.8

Contact ZOOK for alternate sizes and/or flange classes



UHZ\_112019

Visit us at [www.zookdisk.com](http://www.zookdisk.com)

### SERVING AMERICA, CENTRAL & SOUTH AMERICA

16809 Park Circle Drive  
Chagrin Falls, Ohio 44022  
United States

Toll Free: +1 800 543 1043  
Phone: +1 440 543 1010  
Fax: +1 440 543 4930  
E-mail: [sales@zookdisk.com](mailto:sales@zookdisk.com)

### SERVING EUROPE, MIDDLE EAST & AFRICA

Navigation House, Bridge St.  
Killamarsh, Sheffield, S21 1AL  
United Kingdom

Phone: +44 (0) 1909 560999  
Fax: +44 (0) 1909 560860  
E-mail: [sales.europe@zookdisk.com](mailto:sales.europe@zookdisk.com)

### SERVING CANADA

4400 South Service Road  
Burlington, Ontario, L7L 5R8  
Canada

Toll Free: +1 800 370 6057  
Phone: +1 905 681 2885  
Fax: +1 905 681 8838  
E-mail: [sales.canada@zookdisk.com](mailto:sales.canada@zookdisk.com)

### SERVING ASIA PACIFIC

Unit No. 23A-05, Menara Landmark  
No.12, Jalan Ngee Heng  
80000 Johor Bahru, Johor,  
Malaysia

Phone: +60 (7) 2910099  
Fax: +60 (7) 2910096  
E-mail: [sales.asia@zookdisk.com](mailto:sales.asia@zookdisk.com)



Safety through knowledge and performance.